



TEST OUR METAL®

Correction Series Insulated Universal Angle Heated Cabinet

Heated holding/transport/bulk food cart
specifically designed for the correctional market.

- Efficient 990 watt Armor Heat™ system with electronic control and easy to read digital display reaches 230 degrees Fahrenheit
- Stainless steel interior and exterior
- Heavy duty internal angle steel frame welded and cross braced
- Stainless steel perimeter welded hinges for maximum strength and durability
- Flush mounted, recessed heavy duty stainless steel paddle latch minimizes damage and insures door latching
- Stainless steel transport latch with padlock provision to insure maximum security
- Full perimeter door gaskets to maintain temperature and eliminate heat loss
- Extended perimeter bumper
- Welded stainless steel universal angles for 12" x 20" and/or 18" x 26" pans.
- Heavy duty 5" casters; two swivel, two rigid for maneuverability

Job: _____

Item No. _____

Models

CMP M11UA 9
CMP M11UA 12
CMP M11UA 16




Made in USA



451 E. County Line Rd. • P.O. Box 1089 • Mooresville, IN 46158
Toll Free 800-733-8073 • Local 317-831-7030 • Fax 317-831-7036
www.secoselect.com

MODEL #	CAPACITY/ ANGLES	PAN SIZE	WIDTH DIM A	DEPTH DIM B	HEIGHT DIM C	VOLTS	WATTS	AMPS	SHIP WEIGHT
CMP M11UA 9	9	12" X 20" X 2-1/2"	28 7/8"	38 1/4"	53"	120	990	8.25	375
CMP M11UA 12	12	12" X 20" X 2-1/2"	28 7/8"	38 1/4"	65 1/4"	120	990	8.25	450
CMP M11UA 16	16	12" X 20" X 2-1/2"	28 7/8"	38 1/4"	71 1/4"	120	990	8.25	525

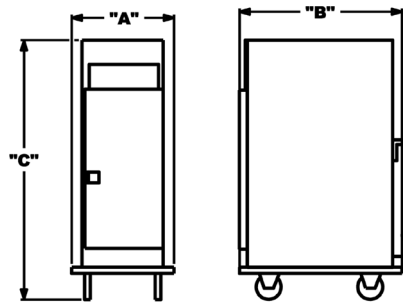

CMP-M-11-UA-16

GENERAL: Cabinet shall be all double wall construction insulated with high density fiberglass. Interior and exterior cabinet shall be stainless steel. Exterior shall be polished to a number four finish.

INTERNAL CABINET: Cabinet shall have a heavy-duty full body frame. All vertical and horizontal interior edges shall be framed with 1 1/2" x 1 1/2" x 1/8" angle steel. Frame shall be fully arc welded, cross braced, and reinforced at all corners.

BASE FRAME: 1/8" formed steel base. Base shall have four 6" x 6" x 5/16" steel plates drilled and tapped to accommodate 5", 6" or 8" casters. The plates are fully welded to frame on all four sides.

INNER CABINET: Inner cabinet shall be 24 gauge 300 series stainless steel. Inner cabinet fully insulated with high density fiberglass, 2" on sides and back and 4" top and bottom. Inner cabinets shall be heated by the Armor Heat™ system. Cabinet shall have tamper-proof fasteners throughout. Cabinet shall come complete with universal angles. Each level shall accommodate 2 (12" x 20") pans or 1 (18" x 26") tray. Each level of universal angles shall have a weight capacity of 250 pounds. Universal angles constructed of heavy gauge wire with vertical and horizontal reinforcements of 11 gauge flat stock.

DOOR: Door shall be 20 gauge stainless steel. Door shall be fully framed with 3/4" X 3/4" 16 gauge angle steel. Frame shall be fully welded. Door shall be fully insulated and gasketed. Door shall have louvers with an adjustable damper for moisture control. All door hardware secured to internal frame of cabinet and door. Door shall have a flush mounted 4 1/4" x 3 5/8" heavy-duty paddle latch. Paddle latch catch shall be 12 gauge stainless steel welded to cabinet. Door shall have a 12 gauge transport latch that will accept a padlock. Door shall be hinged with 12 gauge stainless steel continuous welded hinge.

ELECTRICAL: Cabinet shall have top mounted control panel. The panel consist of an off and on switch, electronic controller with digital temperature display. Panel shall be protected with a stainless steel hinged cover with Lexan window. Cabinet shall have a temperature range of 60 to 230 degrees. Cabinet shall be 990 watts, 120 volts, 8.25 amps, single phase. Cabinet shall have a 8' long power cord attached to rear of cabinet with a compression elbow. Cabinet comes complete with a cord wrap. Cord has a Nema 5-15P plug.

CASTER / BUMPER / PUSH HANDLES: Cabinet shall come complete with 4 heavy-duty 5" x 2" casters. Two rigid and two swivel with brakes. Cabinet shall have a full perimeter bumper. Bumper frame shall be 1/8" formed aluminum plate, with bumper channels welded and riveted to bumper frame. Bumper frame is secured to bottom of the cabinet with 5/16" screws. Cabinet shall have two stainless steel push handles. Push handles constructed of 1" O.D. round tubing welded to 1/8" thick stainless steel mounting brackets. Push handles double bolted and welded to cabinet.

Accessories, Options, Variations

- Pass-thru doors
- Left hand hinged
- Gravity latches
- Eutectic cold plates
- Dutch doors
- Cord reel
- Stainless Steel legs
- Lexan doors



TEST OUR METAL®

451 E. County Line Rd. • P.O. Box 1089 • Mooresville, IN 46158
800-733-8073 • Local 317-831-7030 • Fax 317-831-7036
www.secoselect.com

REV 2016-12